SKU# 406422/406425



3 INCH NUDGE BAR FOR FORD RANGER 2015+

Before Installation

- Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.


Care and Cleaning


- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

INSTALLATION INSTRUCTIONS


Parts list

NO.	QTY	PICTURE	NO.	QTY	PICTURE
1	1	FRONT PIPE	2	1	Left Bracket
3	2	Right Bracket	4	2	Support Bracket
5	2	Spring Washer D12	6	2	Large Washer D12(12x37x3mm)
7	2	Hex Bolt M12_30	8	4	Spring Washer D10
9	7	Large Washer D10(10x30x2.5mm)	19	1	Hex Bolt M10_30
11)	2	Hex Bolt M10_90	12	1	No.5 T-bolt M10(60*16-15)
13	2	Spring Washer D6	14)	2	Large Washer D6 (6x18x1. 6mm)

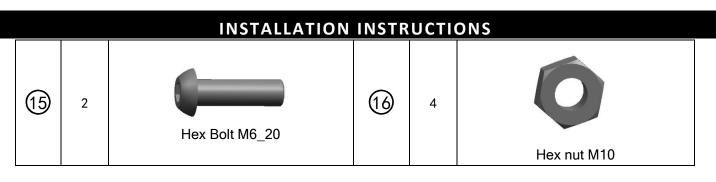

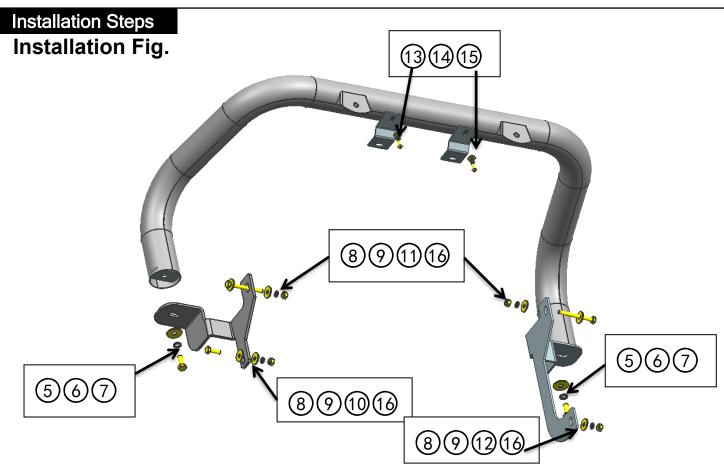

Step 1: Before you start the installation, make sure that you have all the components listed above. Step 2: Fix the left and right brackets to the vehicle as below picture.

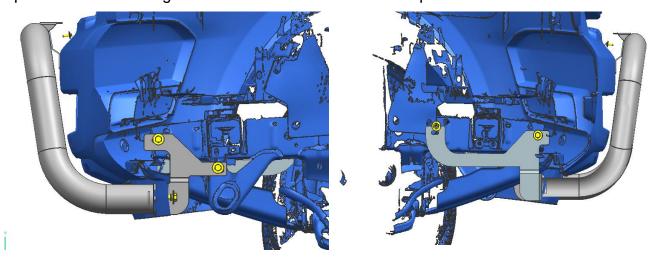


Step 3 (for Ranger PX2 2015-2018): Install the 2 support brackets onto the cross member in front of the radiator. Fix the other side to the side nut-serts of the nudge bar.

INSTALLATION INSTRUCTIONS



Step 3 (for Ranger PX3 2018-2022): Take the two original bolts on the top of license plate and install it on the top brackets as below picture. Fix the other side to the nudge bar.



Step 4: Adjust the nudge bar correctly and lock the bolts tightly.

Step 5: Installation is finished.

NOTE

Any damage and losses caused by improper installation and application will void warranty.